

V23030A1026A104 ✓ ACTIVE

Axicom | Axicom Card Relay SN


TE Internal #: 4-1393801-1

Signal Relays, 250 VDC Contact Voltage, 250 VAC Contact Voltage,  
853 mW Coil Power (DC), Printed Circuit Board, PCB-THT, Axicom  
Card Relay SN

[View on TE.com >](#)



Relays, Contactors & Switches > Relays > Signal Relays > Signal Relay: Low Profile, Monostable DC

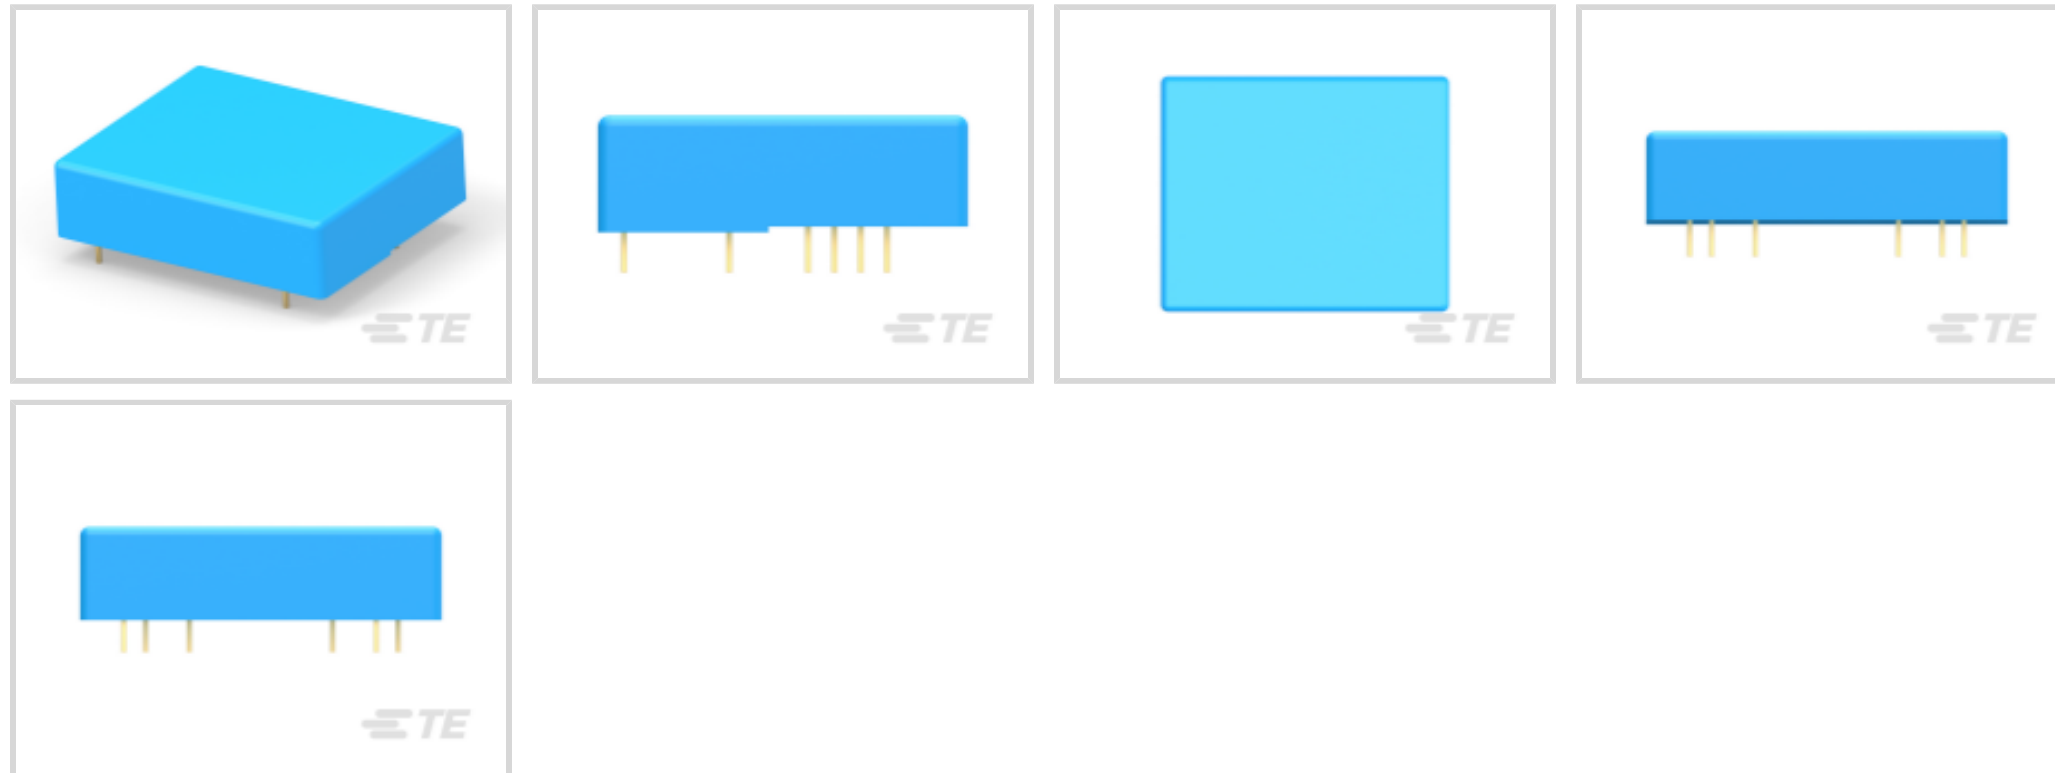

Contact Voltage Rating: **250 VDC**

Signal Relay Coil Power Rating (DC): **853 mW**

Isolation (HF Parameter): **-13.7dB @ 900MHz, -30.6dB @ 100MHz**

Insertion Loss (HF Parameter): **-.02dB @ 100MHz, -.5dB @ 900MHz**

[All Signal Relay: Low Profile, Monostable DC \(11\)](#)

## Features

### Product Type Features

Relay Type	Card SN Relay V23030
Relay Style	Card SN
Product Type	Relay

### Electrical Characteristics

Coil Power Rating Class	800 – 1000 mW
Actuating System	DC
Input Voltage	250 VDC
Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Contact Limiting Short-Time Current	1 A
Insulation Initial Dielectric Between Contacts and Coil	1000 Vrms
Insulation Initial Dielectric Between Coil/Contact Class	500 – 1000 V
Power Consumption	800 mW
Insulation Initial Resistance	1000 MΩ



Contact Limiting Making Current	3 A
Coil Resistance	2700 $\Omega$
Contact Limiting Continuous Current	2 A
Coil Type	Monostable
Contact Limiting Breaking Current	3 A
Contact Voltage Rating	250 VDC
Signal Relay Coil Power Rating (DC)	853 mW
Signal Relay Coil Voltage Rating	48 VDC
Signal Relay Contact Switching Voltage (Max)	250 VDC
Signal Relay Coil Magnetic System	Monostable, DC

### Signal Characteristics

Isolation (HF Parameter)	-13.7dB @ 900MHz, -30.6dB @ 100MHz
Insertion Loss (HF Parameter)	-.02dB @ 100MHz, -.5dB @ 900MHz

### Body Features

Weight	22 g[.777 oz]
--------	---------------

### Contact Features

Contact Plating Material	Gold
Contact Current Class	0 – 2 A
Contact Special Features	Bifurcated/Twin Contacts
Signal Relay Terminal Type	PCB-THT
Signal Relay Contact Current Rating	2 A
Signal Relay Contact Arrangement	4 Form C (4 CO)
Contact Material	AgNi+Au
Contact Number of Poles	4

### Termination Features

Termination Type	Through Hole
------------------	--------------

### Mechanical Attachment

Signal Relay Mounting Type	Printed Circuit Board
----------------------------	-----------------------

### Dimensions

Width Class (Mechanical)	30 – 40 mm
Width	32.4 mm[1.275 in]
Height	10.2 mm[.402 in]



Length Class (Mechanical)	35 – 40 mm
Height Class (Mechanical)	10 – 11 mm
Length	39.7 mm[1.563 in]
Dimensions (L x W x H) (Approximate)	39.7 x 32.4 x 10.2 mm

### Usage Conditions

Environmental Ambient Temperature (Max)	70 °C[110 °F]
Environmental Ambient Temperature Class	50 – 70°C
Operating Temperature Range	-40 – 70 °C

### Operation/Application

Performance Type	Standard
------------------	----------

### Packaging Features

Packaging Method	Box & Carton
------------------	--------------

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Also in the Series | Axicom Card Relay SN



Signal Relays(11)

## Customers Also Bought



TE Part #2-2176231-4  
3522 91R 1% 3W




TE Part #2-1622824-0  
RL73H 2B R33 1% 5K RL




TE Part #3-2176057-5  
RLP73K 3A R27 1% 1K RL



TE Part #6-1393238-9  
RTD14048

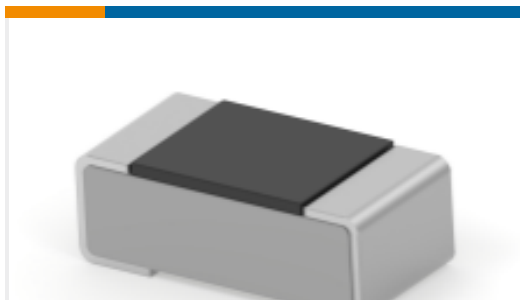

TE Part #2-2176338-1  
CRGCO 0402 2K2 5%

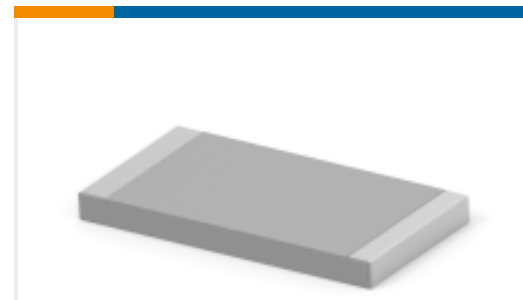

TE Part #2-2176331-3  
CRGP 2512 680R 1%



TE Part #1393222-4  
V23061A1002A302=MINISTARKSTROM

## Documents

### CAD Files

[3D PDF](#)

[3D](#)

### Customer View Model

[ENG\\_CVM\\_CVM\\_4-1393801-1\\_A.2d\\_dxf.zip](#)

English

### Customer View Model

[ENG\\_CVM\\_CVM\\_4-1393801-1\\_A.3d\\_igs.zip](#)

English

### Customer View Model

[ENG\\_CVM\\_CVM\\_4-1393801-1\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



**Product Specifications**

**Definitions General Purpose Relays**

English

**Product Specification**

English